



# PC PUMP


pumps with electronic controller

Domestic pumps with a pressure sensing electronic controller for automatic operation; the pump operates as required as a tap is opened or closed. The controller also provides protection for the pump against dry running.



## DIMENSIONS

TYPE	POWER	
	kW	HP
Single-phase		
PC/IP 500M	0.37	0.50
PC/IP 700M	0.50	0.70
PC/IP 800M	0.60	0.85
PC/IP 1000M	0.75	1
PC/IP 1500M	1.1	1.5
PC/IC 100M	0.75	1
PC/IC 100MH	0.75	1
PC/IC 150M	1.1	1.5
PC/IC 150LM	1.1	1.5
PC/ICB 100NM	0.75	1
PC/ICB 150HM	1.1	1.5
PC/ICB 150MM	1.1	1.5
PC/MSG 05M	0.37	0.50
PC/MSG 07M	0.45	0.60
PC/MSG 08M	0.60	0.85
PC/MSG 08LM	0.60	0.85
PC/MSG 10M	0.75	1
PC/JS 05M	0.37	0.50
PC/JS 07M	0.50	0.70
PC/JS 08M	0.60	0.85
PC/JS 10HM	0.75	1
PC/JS 12HM	0.90	1.25
PC/JS 15HM	1.1	1.5
PC/JS 10LM	0.75	1
PC/JS 12LM	0.90	1.25
PC/JS 15LM	1.1	1.5
PC/JSE 15HM	1.1	1.5
PC/JSE 15MM	1.1	1.5
PC/JSE 15LM	1.1	1.5

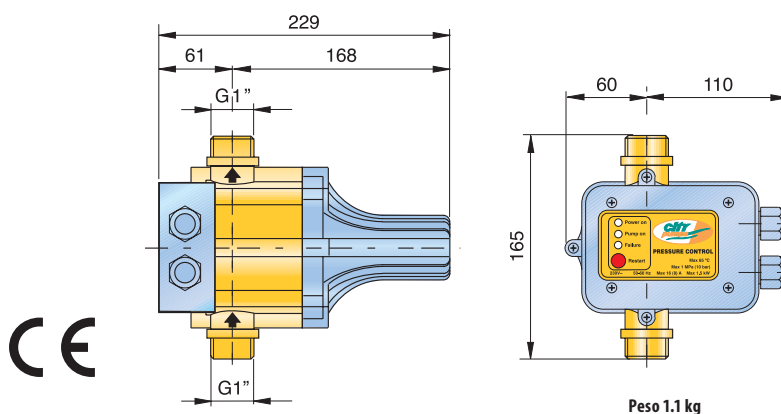

Peso 1.1 kg

Typical installation

### COMPONENTS

- Single-phase electropump 230V - 50Hz
- PRESSURE CONTROL
- 1.5 metre cable with Schuko plug

\*For correct operation of the PRESSURE CONTROL device, the height of the column of water must not exceed 15 metres

